



Model shown is TS 43

TS 43 / TS 4 VP

Compact Drying Cabinets

TS 43 and TS 4 VP are excellent drying cabinets, perfect for rooms where space is limited. The cabinets are 60 cm (23.4 inches) wide. TS 43 E holds 6 kg (13.2 lbs) of laundry and TS 4 VP holds 4 kg (8.8 lbs) of laundry. They are equipped with an extendible hanging system which simplifies the laundry operation.

Drying cabinets are great complements to tumble dryers since they dry without any mechanical action. In TS 43 all controls and electrical components are placed in a pull-out fan package which makes it easy to repair and maintain. TS 4 VP uses heat pump technology for an even more efficient and gentle drying.

Details

- Capacity 6 kg (13.2 lbs) resp. 4 kg (8.8 lbs)
- Hanging length 16 m (52,5 ft)
- Energy consumption 2,5 resp. 1,2 kWh
- Compact design
- Control panel with LCD
- Two humidity controlled automatic programs
- Timed drying - TS 43
- Extendible hanging system
- The door can be ordered right or left hanging - TS 43
- Overheat protection
- Baskets as optional extra
- Hook rack as optional extra
- Touch buttons - TS 4 VP
- 5 selectable languages - TS 4 VP

| Main Data | TS 43 | TS 4 VP |
|--------------------------------------|-----------|-----------|
| Capacity, kg/lbs | 6 (13.2) | 4 (8.8) |
| Hanging length, m (ft) | 16 (52.5) | 16 (52.5) |
| Heating effect, kW | 1.5 | - |
| Part no | 131043 | 131040 |
| Consumption data, normal temperature | | |
| Drying time, min | 85 | 90 |
| DRying Capacity, g/min | 25 | 22 |

*Drying of 4 kg cotton (dry weight) washed and high-spinned.

About PODAB

PODAB is a Swedish company that has been in the laundry business since 1945. Podab develops, manufacture and market quality products at competitive prices for multiple apartment buildings, laundry rooms and for professional use.

Contact us




If you have any questions, please feel free to contact us on 020 8936 7083. You can also visit our website at www.podab.co.uk.

| Drying Cabinet | | TS 43 | TS 4 VP |
|-------------------------------|--------------------------------|------------------|------------------|
| Electrical connections | Phase/Voltage/Frequency | 1~N/230V/50-60Hz | 1~N/230V/50-60Hz |
| | Total effect, kW | 2.04 | 0.9 |
| | Fuse, A | 10 | 10 |
| | Cable length, mm (inch) | 2400 (94.5) | 2500 (98.4) |
| Air connections | Outlet exhaust, Ø mm (inch) | 100 (3.93) | - |
| | Outlet air flow, m³/h (ft³/h) | 95 (3355) | - |
| Heat pump | Condensate pipe, Ø mm (inch) | - | 13 (1/2) |
| | Refrigerant | - | R407C |
| | Amount of refrigerant, g (oz) | - | 300 (10.6) |
| Optional extras | Air exchanger 1 vent., part no | 141009 | - |
| | Air exchanger 2 vent., part no | 141018 | - |
| Sound level | Airborne sound level, dB(A) | 55 | 52 |
| Weight | Net, kg (lbs) | 60 (132) | 95 (209) |
| | Shipping data net, kg (lbs) | 65 (143) | 100 (220) |

Front

Left Side

Rear Side

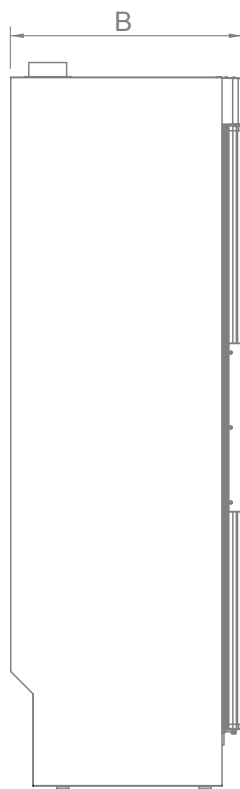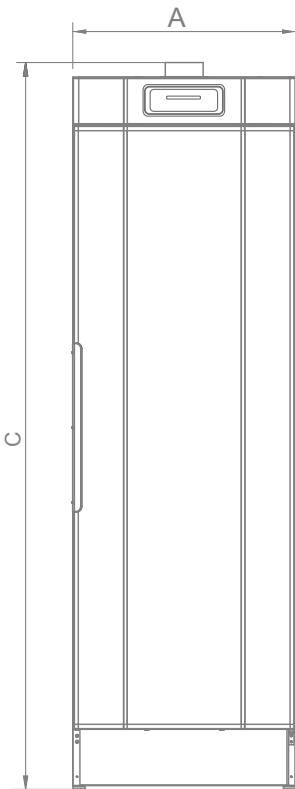

Model shown is TS 43

| Dimensions, mm (inch) | A | B | C | D |
|-----------------------|------------|------------|-------------|----------------------------|
| | Width | Depth | Height | Exhaust position from back |
| TS 43 E | 595 (23.4) | 641 (25.2) | 1939 (76.3) | 100 (3.9) |
| TS 43 VP | 595 (23.4) | 675 (26.6) | 1925 (75.8) | - |



28-05-20. Changes can be made without prior notice.